



SERIES 38

SPECIFICATIONS

The Hose Connection Vacuum Breaker shall prevent cross connection of contaminated water into the potable water supply caused by back-siphonage. It shall consist of a single check with an atmospheric breaker vent.

The device shall have a break-away set-screw for tamper proof protection and permanent installation. All parts shall be made of corrosion resistant materials. The backflow preventer shall be suitable for **supply pressure up to 125 psig and water temperature from 33°F to 180°F.**

The unit shall meet the requirements of the following standards: **ASSE 1011, CSA B64.2 and IAPMO.**

FEATURES

38-304

- Tamper proof protection
- Corrosion resistant
- Manual drain feature on stem


38-404

- For wall and yard hydrant application
- Tamper proof protection
- Corrosion resistant
- External manual drain feature for freezing conditions

DIMENSIONS (in.)WEIGHTS (lbs.)

MODELS	A	B	WT./100
38-304	1-5/16	1-1/4	16.8
38-404	1-15/16	1-5/16	30.0

3/4" Hose Connection Vacuum Breaker

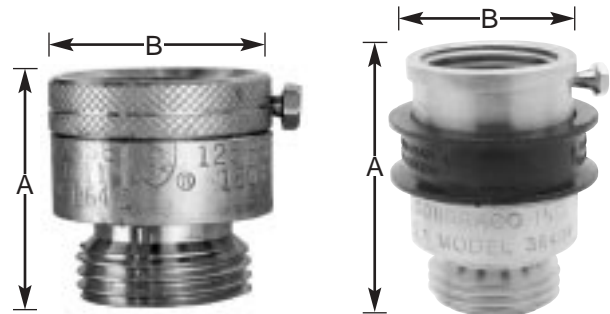

38-304

38-404

NO.	FINISH	NO.	FINISH
38-304-AS	SATIN BRASS	38-404-AS	SATIN BRASS
38-304-CS	SATIN CHROME	38-404-CS	SATIN CHROME

APPROVALS

The Series 38 is approved under : **ASSE 1011, CSA B64.2 and IAPMO.**



SPEC 38 Series

BACKFLOW PRODUCTS DIVISION

Conbraco Industries, Inc. P.O. Box 247 Matthews, N.C. 28106 (704) 847-9191 FAX (704) 841-6020