



40-200 SERIES

STAINLESS STEEL REDUCED PRESSURE PRINCIPLE BACKFLOW PREVENTER

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

SPECIFICATIONS

The 1/4" – 1" Stainless Steel Reduced Pressure Principle Backflow Preventer shall be an Apollo® 40-200-TS Series. The assembly shall be manufactured in America with all domestic components and parts. The stainless steel body shall be configured with individually-accessible top-access check valves including top-mounted test cocks. The relief valve shall be bottom-centered with a separate access cover. The replaceable seat rings shall be glass-filled Noryl® and the reversible seat discs shall be silicone rubber. The Apollo® domestic shut-off ball valves shall have stainless steel handles. The assembly shall prevent contamination of the potable water supply due to back-siphonage or backpressure from substances that are health or non-health hazards. The pressure drop across the assembly shall be documented by USC's FCCC&HR approval curves.

FEATURES

- Replaceable seats & reversible silicone seat discs
- Top-mounted test cocks for easy testing
- Corrosion resistant
- MADE IN THE USA

ORDERING INFORMATION

4 0 - 2 0 X - T X S

SIZE

- | | | |
|-----------------------------------|-----------------------------------|---------------------------------|
| <input type="checkbox"/> 1 – 1/4" | <input type="checkbox"/> 3 – 1/2" | <input type="checkbox"/> 5 – 1" |
| <input type="checkbox"/> 2 – 3/8" | <input type="checkbox"/> 4 – 3/4" | |



SHUT-OFF VALVES (Inlet x Outlet)

- 1 – Less ball valves
- 2 – With Apollo® ball valves

APPROVALS

ASSE® 1013, CSA® B64.4, IAPMO, USC's FCCC&HR, AWWA C-511, and UL*.

*UL-Classified less ball valves only (3/4" & 1" only)



PERFORMANCE RATING

Maximum Working Pressure 175 psi
 Hydrostatic Test Pressure 350 psi
 Temperature Range 33 °F – 180 °F





DIMENSIONS (in.) – WEIGHTS (lbs.)

Size	1/4", 3/8", 1/2"	3/4"	1"
A	10 1/2	13 1/2	15 3/8
B	5 3/4	8	8
C	6 7/8	9	9
D	2 5/8	4 1/8	4 1/8
Wt.	7.4	14	14.5

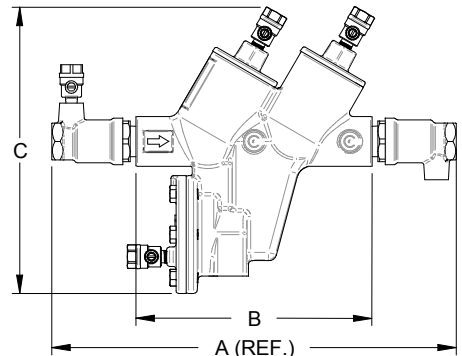

FLOW CURVES

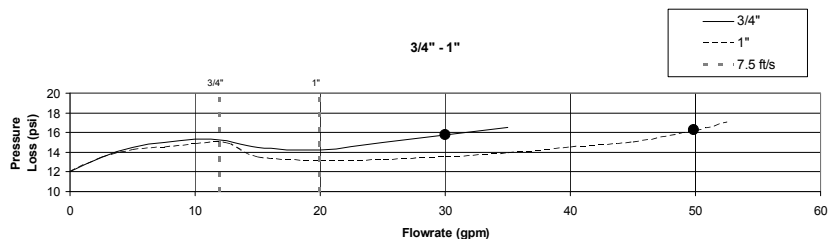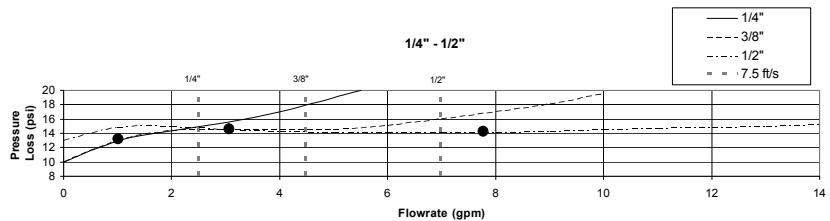

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28105 USA; www.apollovalves.com; 704-841-6000

This specification is provided for reference only. Conbraco reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold.