



MODEL BAV

BALANCING VALVE

(58 SERIES)

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

DESCRIPTION

The Apollo® BAV provides dependable hydronic system balance control utilizing corrosion resistant materials and Made in the USA construction.


FEATURES

- 1/2" or 3/4" Solder connections
- 100% Factory Tested
- Easily Adjustable
- Dezincification resistant cast bronze body

MATERIAL SPECIFICATIONS


Part Name	Material
Packing Washer	11 Ga. Brass
O-Ring	EPDM Rubber
Stem	Brass, ASTM B16
Gland Screw	Brass, ASTM B16
Valve Body	Cast Bronze, ASTM B584

CAPACITY

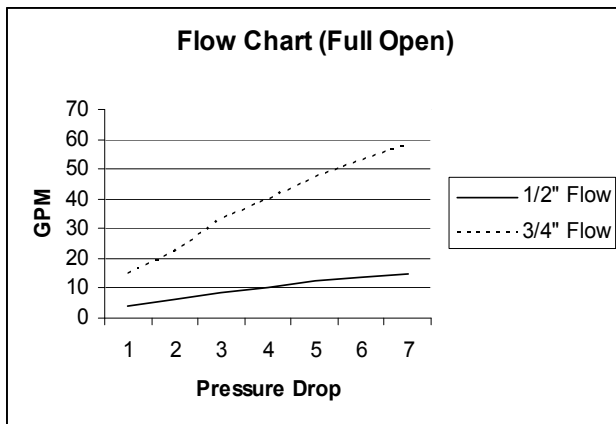

PERFORMANCE RATING

Maximum Operating Pressure - 300 psig
 Maximum Operating Temperature - 250°F

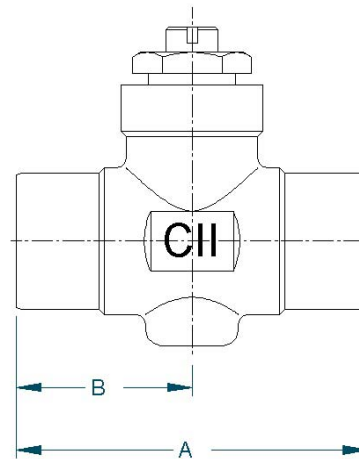

DIMENSIONS

Model #	Item #	Size	A	B	CV	Wt. (Lb)	Box Qty.
BAV12	58-003-01	1/2"	2.13	1.06	4	.30	100
BAV34	58-004-01	3/4"	2.75	1.37	14	.53	50

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28105 USA ; www.apollovalves.com ; 704-841-6000

This specification is provided for reference only. Conbraco reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold.